




- High Sampling Time
- 3 Different Input Function In 1 Instrument
- 2 pcs Relay Outputs (Optional 4 pcs)
- Adjustable Output Times
- Automatic Calibration
- Hysteresis
- TARE Function (ABS/REL Reset)
- Offset Value
- Password Protection

ALP94UNI has 3 different input function;

» Potentiometer Input

» 0-10 VDC Input

» 0-20 mA / 4-20 mA Input

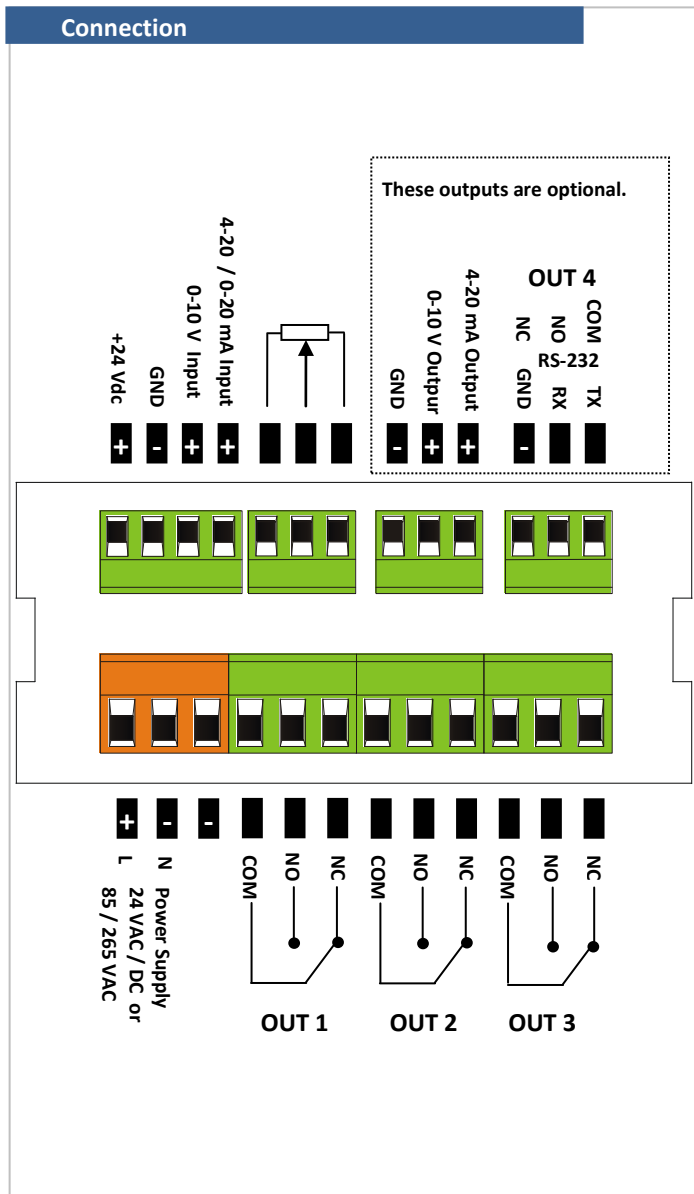

Technical Specifications

Power Supply	24 VAC/DC 50/60 Hz 85-265 VAC 50/60 Hz
Power Consumption	7 VA / 5,6 W Maximum
Sensor Power Supply	24 VDC 50 mA
Wiring	2,5 mm ² Socket Terminal
Inputs	Potentiometer 0-10 V 4-20 mA 0-20 mA
Outputs (Analog)	0-10V (Optional) 4-20 mA (Optional)
Outputs (Relays)	2 pcs (Optional 4) 250 VAC 3A (For resistive load) Relay
Serial Communication	RS-232 (Optional)
Dimensions	96 x 48 x 88 mm
Weight	300 grams
Relative Humidity	Up to 31 °C %80, above 31 °C linear decreasing and at 40 °C %50
Storage Temperature	-10 to 60 °C
Operating Temperature	0 to 50 °C
Protection Class	IP60 Front Panel, IP20 Rear Panel

Mekanik Ölçüler

